




IRUPOD

ANCLAJE

Product

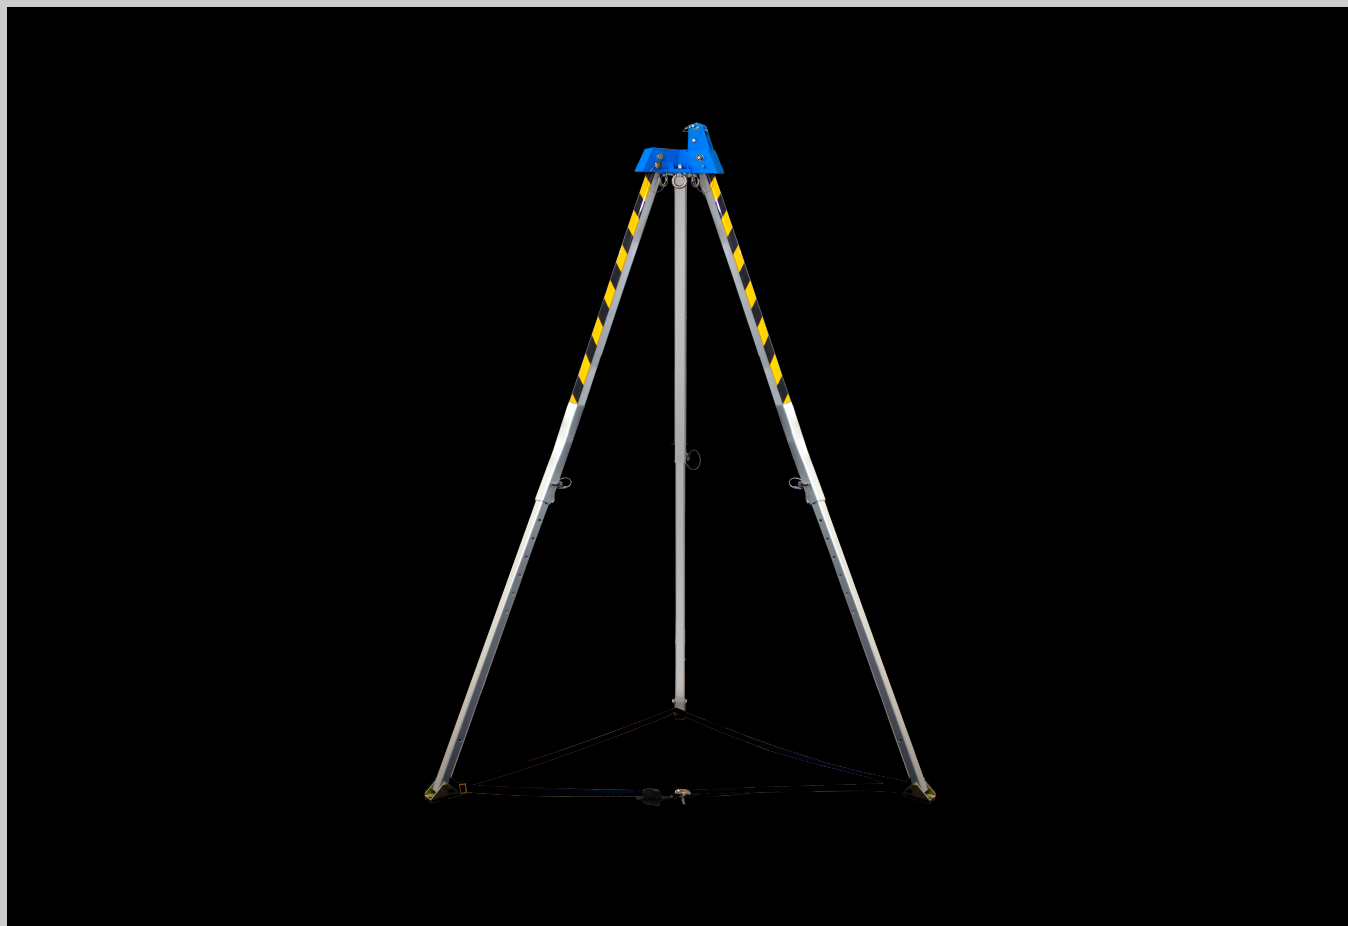

Description

- Anchorage device designed to provide anchorage points during work in confined spaces.
- Aluminium alloy head with pulley.
- 3 stainless steel eye bolts.
- Telescopic aluminium legs, adjustable in height using removable pins with anti-loss links.
- Legs with built-in non-slip rubber pads and an adjustable safety strap to limit the opening and prevent accidental movement.
- For loads of up to 500 kg.
- Certified for work in explosive atmospheres ATEX II 2G Ex h II c T6.
- Includes an IRUPOD BAG carry case.

CHARACTERISTICS

Technical characteristics	Regulations	EN 795 B CEN/TS 16415 ATEX II 2G Ex h II c T6
	Diameter	100 cm – 150 cm
	Height	115 cm – 215 cm
	Capacity of load	500kg
	Users	3
	Anchor rings	3
	No. of pulleys	1
	Shelf life	Unlimited
MATERIALS	Head	Aluminium alloy with a spray-painted finish
	Rings	Stainless steel with a deburred and polished finish
	Legs	Aluminium alloy with an anodised finish
	Tape	Polyester
	Non-slip bases	Iron + rubber